



# T<sub>FIX</sub> M8 OVERVIEW PER ANCHOR LENGTH AND H<sub>EF</sub>

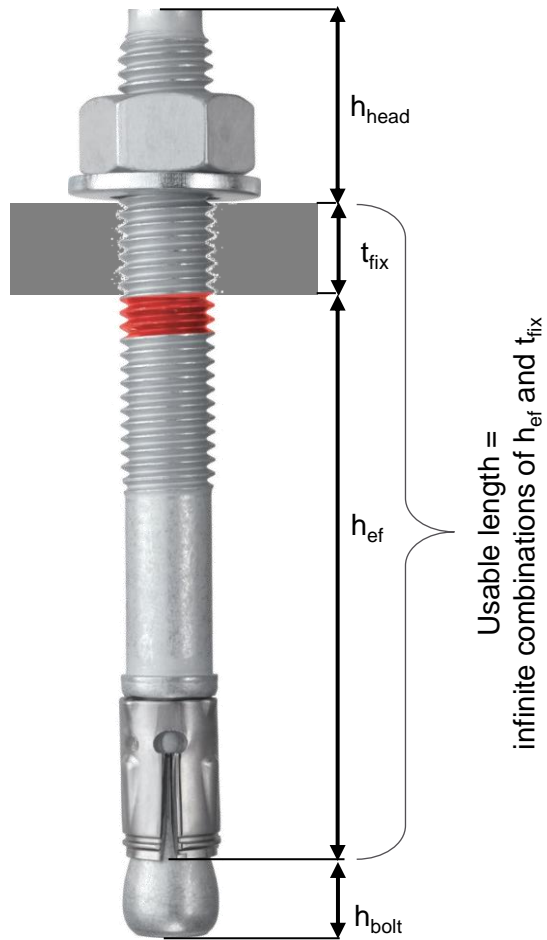

Anchor length	Usable length	h <sub>ef</sub>													
		47	50	52	55	60	65	70	72	75	80	85	90	t <sub>fix</sub>	
75	57	10	7	5											
95	77	30	27	25	22	17	12	7	5						
115	97	50	47	45	42	37	32	27	25	22	17	12	7		


# T<sub>FIX</sub> M10 OVERVIEW PER ANCHOR LENGTH AND H<sub>EF</sub>

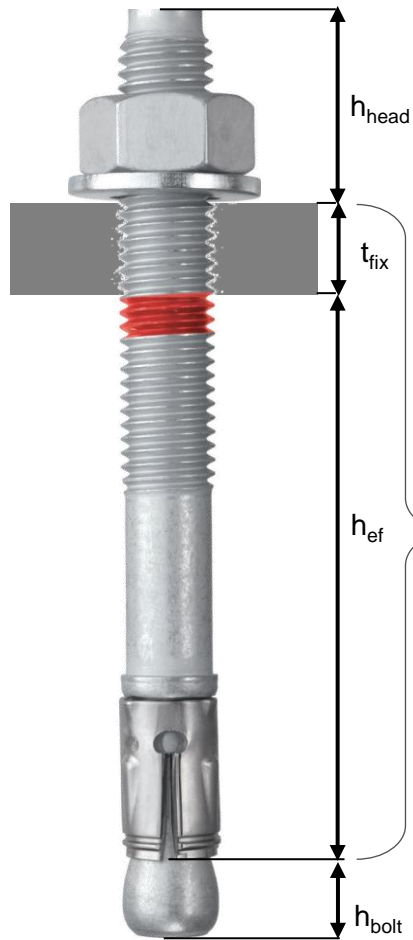

Usable length =  
infinite combinations of  $h_{ef}$  and  $t_{fix}$

Anchor length	Usable length	hef													
		40	45	50	55	60	65	70	75	80	85	90	95	100	
70	50	10	5	[shaded]											
80	60	20	15	10	5	[shaded]									
90	70	30	25	20	15	10	5	[shaded]							
100	80	40	35	30	25	20	15	10	5	[shaded]					
110	90	50	45	40	35	30	25	20	15	10	5	[shaded]			
130	110	70	65	60	55	50	45	40	35	30	25	20	15	10	
160	140	100	95	90	85	80	75	70	65	60	55	50	45	40	
200	180	140	135	130	125	120	115	110	105	100	95	90	85	80	


# T<sub>FIX</sub> M12 OVERVIEW PER ANCHOR LENGTH AND H<sub>EF</sub>

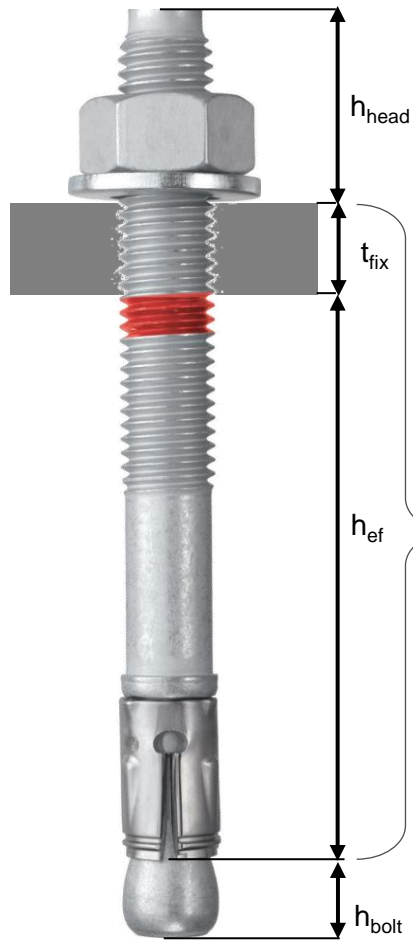

Usable length =  
infinite combinations of  $h_{ef}$  and  $t_{fix}$

Anchor length	Usable length	hef															
		50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125
85	60	10	5	[shaded]													
95	70	20	15	10	5	[shaded]											
105	80	30	25	20	15	10	5	[shaded]									
115	90	40	35	30	25	20	15	10	5	[shaded]							
125	100	50	45	40	35	30	25	20	15	10	5	[shaded]					
145	120	70	65	60	55	50	45	40	35	30	25	20	15	10	5	[shaded]	
165	140	90	85	80	75	70	65	60	55	50	45	40	35	30	25	20	15
185	160	110	105	100	95	90	85	80	75	70	65	60	55	50	45	40	35
215	190	140	135	130	125	120	115	110	105	100	95	90	85	80	75	70	65
235	210	160	155	150	145	140	135	130	125	120	115	110	105	100	95	90	85
255	230	180	175	170	165	160	155	150	145	140	135	130	125	120	115	110	105
295	270	220	215	210	205	200	195	190	185	180	175	170	165	160	155	150	145
350	325	275	270	265	260	255	250	245	240	235	230	225	220	215	210	205	200


# T<sub>FIX</sub> M16 OVERVIEW PER ANCHOR LENGTH AND H<sub>EF</sub>

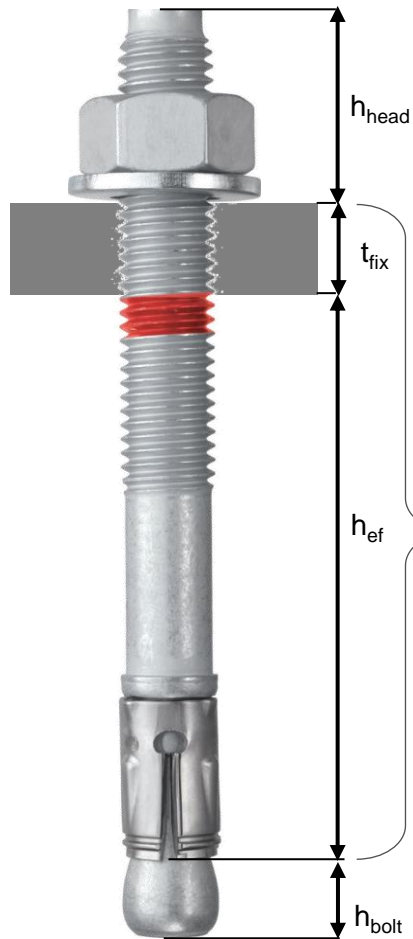

Usable length =  
infinite combinations of  $h_{ef}$  and  $t_{fix}$

Anchor Length	Usable length	h <sub>ef</sub>																					
		65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160		
115	80	15	10	5																			
135	100	35	30	25																			
145	110	45	40	35	30	25	20	15	10	5													
170	135	70	65	60	55	50	45	40	35	30											25	20	15
220	185	120	115	110	105	100	95	90	85	80	75	70	65	60	55	50	45	40	35	30	25		
260	225	160	155	150	145	140	135	130	125	120	115	110	105	100	95	90	85	80	75	70	65		
300	265	200	195	190	185	180	175	170	165	160	155	150	145	140	135	130	125	120	115	110	105		
365	330	265	260	255	250	245	240	235	230	225	220	215	210	205	200	195	190	185	180	175	170		
425	390	325	320	315	310	305	300	295	290	285	280	275	270	265	260	255	250	245	240	235	230		
475	440	375	370	365	360	355	350	345	340	335	330	325	320	315	310	305	300	295	290	285	280		

# T<sub>FIX</sub> M20 OVERVIEW PER ANCHOR LENGTH AND H<sub>EF</sub>

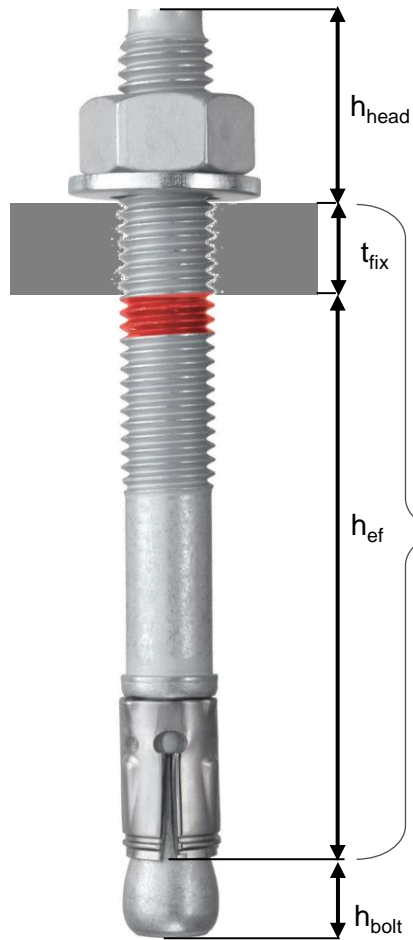

Usable length =  
infinite combinations of  $h_{ef}$  and  $t_{fix}$

Anchor length	Usable length	h <sub>ef</sub>																										
		101	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180										
170	135	34	30	25	20	15	10	5											$t_{fix}$									
200	165	64	60	55	50	45	40	35											30	25	20	15	10	5				
260	225	124	120	115	110	105	100	95											90	85	80	75	70	65				